



STEELS & SHEETMART



SS Steels and Sheet Mart: Your One-Stop Destination for Quality Steel and Sheet Solutions

Introduction:

Welcome to SS Steels and Sheet Mart, your trusted provider of top-notch steel products and sheet solutions. With our unwavering commitment to quality, reliability, and customer satisfaction, we have become a leading name in the industry. Whether you're involved in construction, manufacturing, or any other steel-related endeavor, we are here to fulfill your needs with excellence.

About Us:

At SS Steels and Sheet Mart, we take pride in being a premier supplier of high-quality steel products and sheet materials.

With years of experience and industry expertise, we have established ourselves as a reliable and customer-centric company. Our dedication to providing superior products and exceptional service sets us apart from the competition.

Product Range:

We offer an extensive range of steel products and sheet solutions to cater to various industries and applications. Our comprehensive product lineup includes:

Steel Products:

We supply a wide array of top-grade steel products, including structural steel beams, bars, pipes, tubes, and plates. Our steel products are sourced from trusted manufacturers known for their adherence to quality standards, ensuring reliability, durability, and optimal performance for your projects.

Sheet Materials:

At SS Steels and Sheet Mart, we offer a diverse selection of sheet materials to meet your specific requirements. Our range includes galvanized sheets, stainless steel sheets, aluminum sheets, and more.

These sheets are known for their strength, corrosion resistance, and versatility, making them ideal for various industrial, construction, and fabrication

Quality Assurance:

Quality is the cornerstone of our operations. We understand the importance of using premium materials and adhering to strict quality control measures. That's why we partner with reputable suppliers and manufacturers who share our commitment to excellence. Our products undergo rigorous testing to ensure they meet or exceed industry standards, guaranteeing the highest level of quality and performance.

Customer Satisfaction:

At SS Steels and Sheet Mart, customer satisfaction is our ultimate goal. We believe in forging long-term partnerships with our clients based on trust, reliability, and exceptional service. Our knowledgeable and friendly team is dedicated to understanding your unique needs and providing tailored solutions that align with your project requirements. We aim to deliver a seamless experience, from product selection to on-time delivery.

Competitive Advantage:

Choosing SS Steels and Sheet Mart gives you a competitive edge. We pride ourselves on our ability to offer competitive pricing without compromising on quality.


Our vast product inventory, combined with our streamlined supply chain and efficient logistics, ensures prompt and reliable delivery of your orders. With us, you can expect a hassle-free experience and

COLOUR COATED TILE SHEET

SPECIFICATION

Width	: 1110 mm
Length	: .4 to 20 feet
Thickness	: 0.35 mm to .50 mm
Metallic Coating	: AZ -70/AZ -150
Paint System	: 4 Coat System
Paint Coating	: 30 Micron
Tensile Strength	: Upto 240 Mpa
Model	: Spanish Tile

EXTENSIVE RANGE
OF COLOURS AVAILABLE

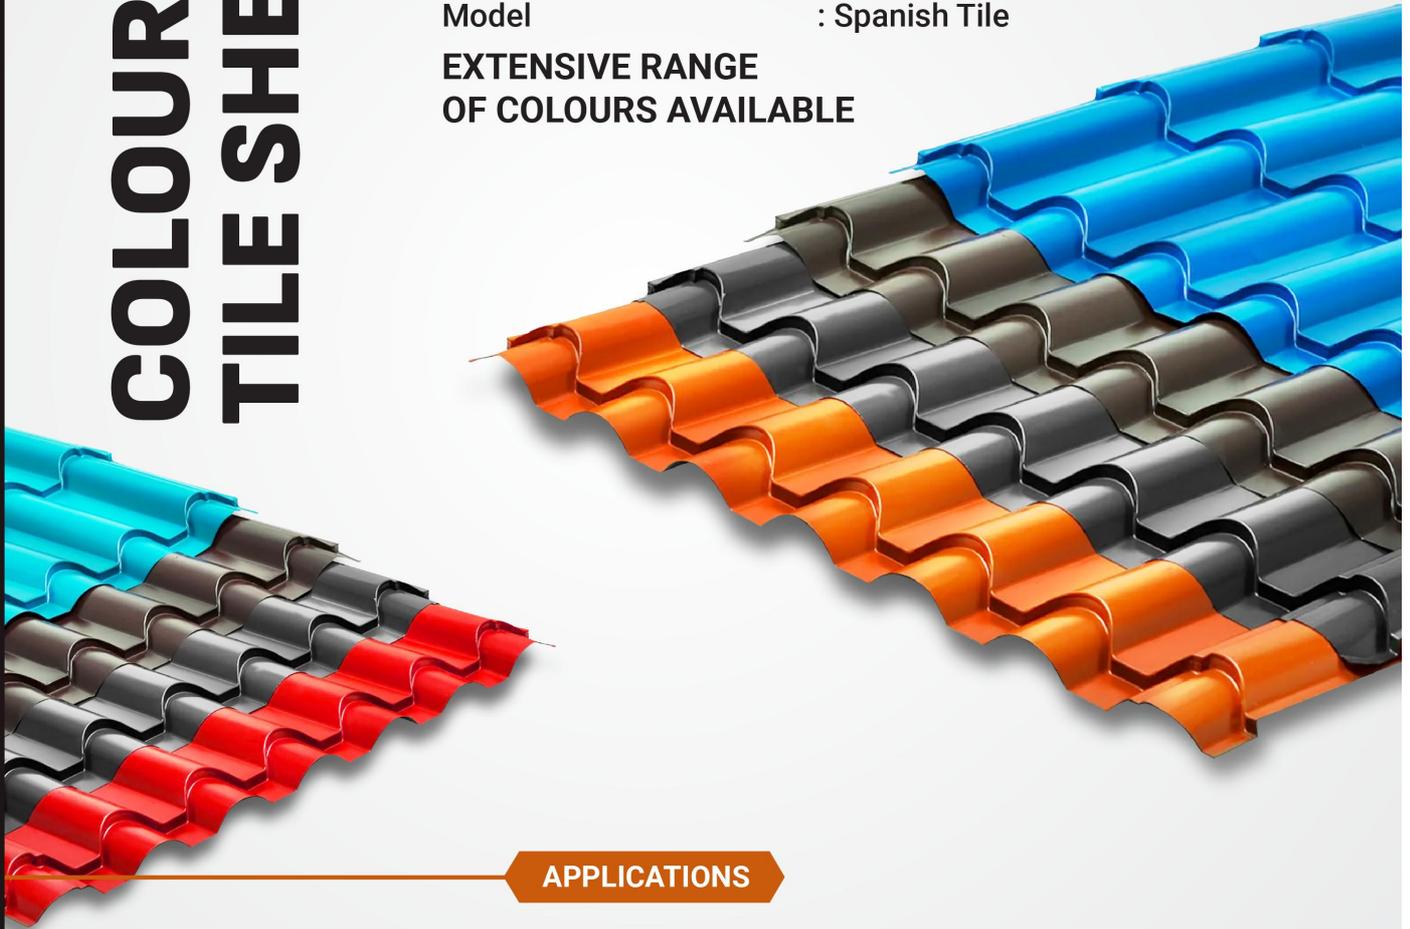

APPLICATIONS

⊙ Industrial Sheds ⊙ Residential Roofs ⊙ Warehouse Sheds ⊙ Commercial Buildings



Resistant to
Corrosion



Extreme Weather
Resistant



High Strength to
Weight Ratio



Strong, Durable &
Total Safety



SANDWICH PUF PANELS

Metal Thickness

Top	0.30-0.60 mm
Bottom	0.30-0.35 mm

SPECIFICATION

- Panel length : 1.10 meter
- Strength : 240 MPA
550 MPA
- Coating Mass:AZ 70 : AZ 70
AZ 150
- Material : PPGI,PPGL
Coated Aluminium
- Overall Density (Average) : 40-42 kg/m³
- Total width : 1100mm
- Effective width : 1 meter
- Panel Thickness : 20 mm,30 mm,50 mm
- Core : 6


ROOFING SHINGLES

SPECIFICATION

Total Height of Shingle	: 335 mm
Height of the Visible part	: 142 mm
Height of the Laminated part	: 165 mm
Width of the Shingle	: 1000 mm

ADVANTAGES


Easy to install
Easy to repair
Sound protection
Withstand high winds
Energy efficient
Cost efficient
Quality assured
Algae resistant
Available in trendy colours

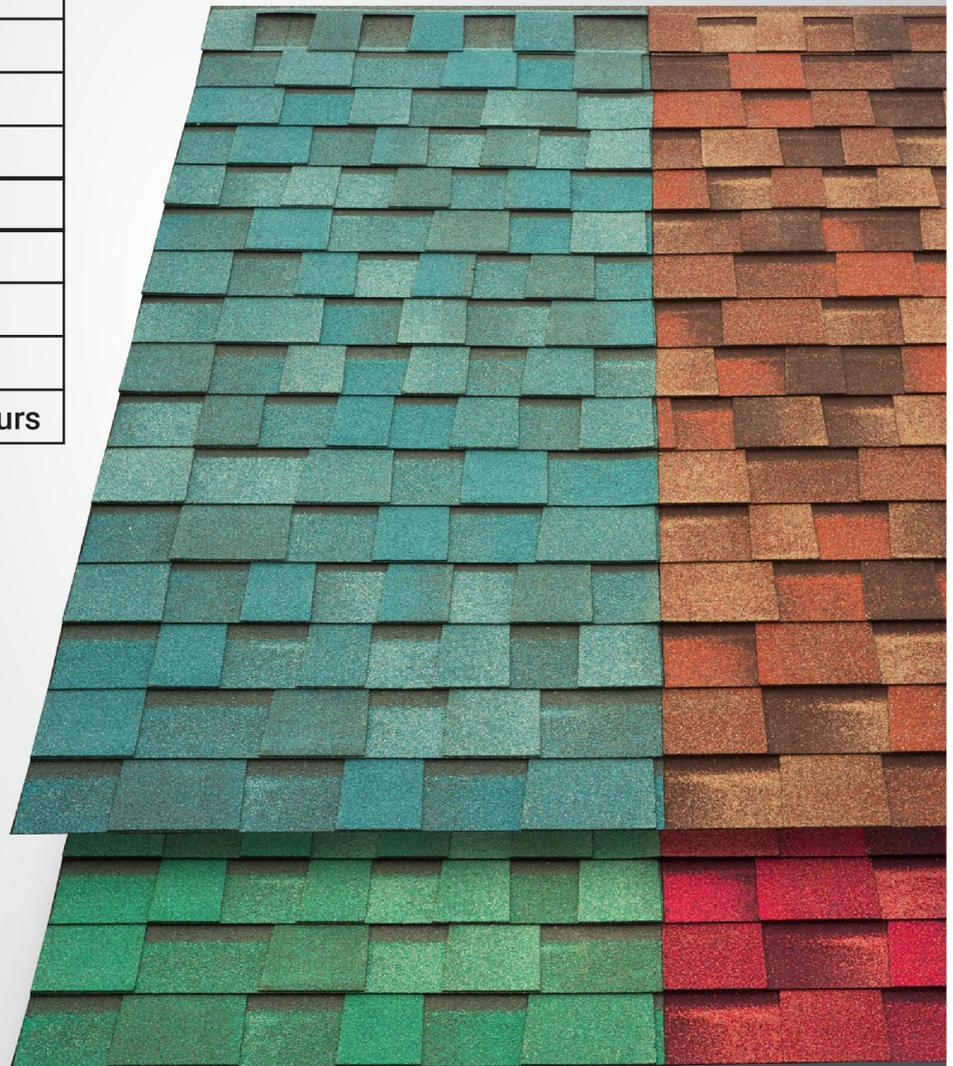

DECKING SHEET

SPECIFICATION

Crest height	: 51 mm
Tile length	: 232 mm
Supplied width	: 960 mm
Covered width	: 930 mm
Thickness range	: 0.80-1.20 mm

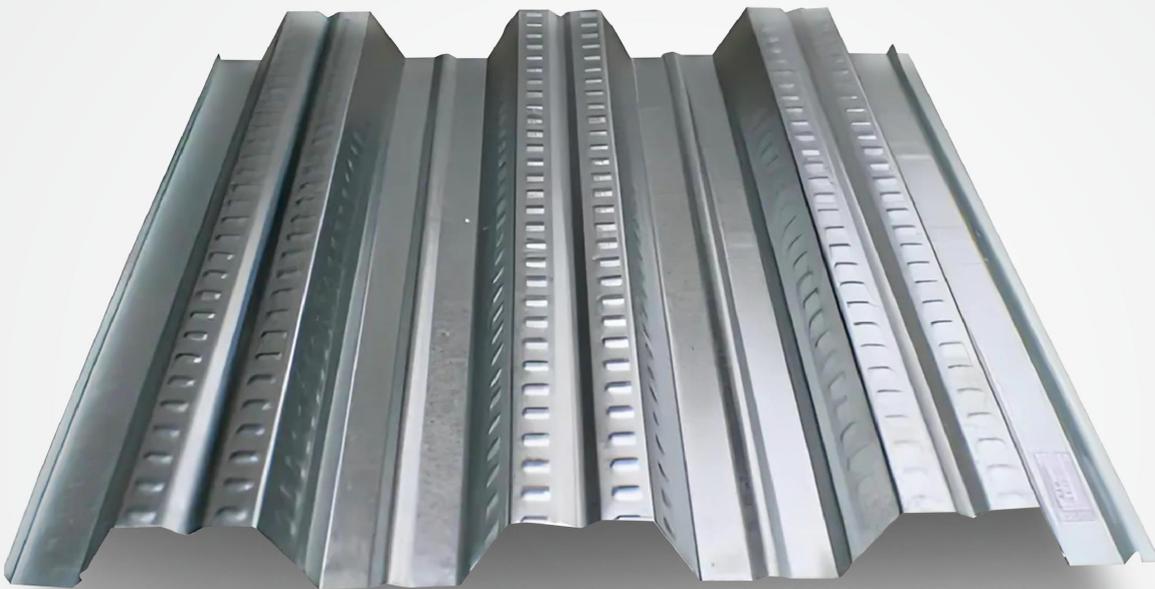

ADVANTAGES

- Ease of installation
- Acts as a composite member and as a permanent shuttering.
- No major reinforcement is required.
- Speedy construction enables faster completion of a project.
- Decking reduces the construction time, hence the total cost
- Decking Sheet can be used for light weight purpose.


COLOUR COATED ALUMINIUM TRAFFORD SHEET

ORALIUM STRONG

Trough depth	: 32 mm
Pitch	: 195 mm
Supplied width	: 1060 mm
Covered width	: 975 mm
Length	: upto 7.4 meter
Thickness	: 0.40-0.71 mm
Core	: 6

ORALIUM WIDE

Trough depth	: 32 mm
Pitch	: 195 mm
Supplied width	: 1100 mm
Covered width	: 1 meter
Length	: upto 7.4 meter
Thickness	: 0.40-0.71 mm
Core	: 6

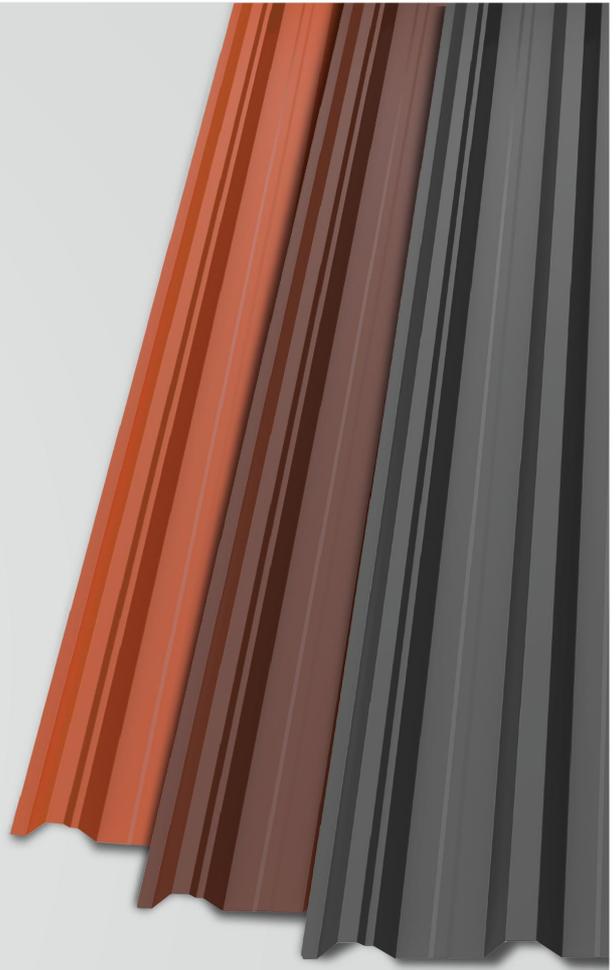

OUR TRUSTED BRANDS



BHARAT ROOFING



UPVC ROOFING SHEET [TROUGHED]

SPECIFICATION


Thickness of sheet	: 1.5mm, 2.0mm, 2.5mm, 3.0mm,
Features	: Sound Insulation, Heat Resistance
Surface Treatment	: Color Coated
Material	: UPVC
Length	: 11800 mm
Width	: 900 mm



UPVC ROOFING SHEET [TITLE]

SPECIFICATION

Color	: Red, Gray
Thickness	: 2.5mm
Technique	: PVC
Area of application	: residential & commercial
Brand	: Polytuff

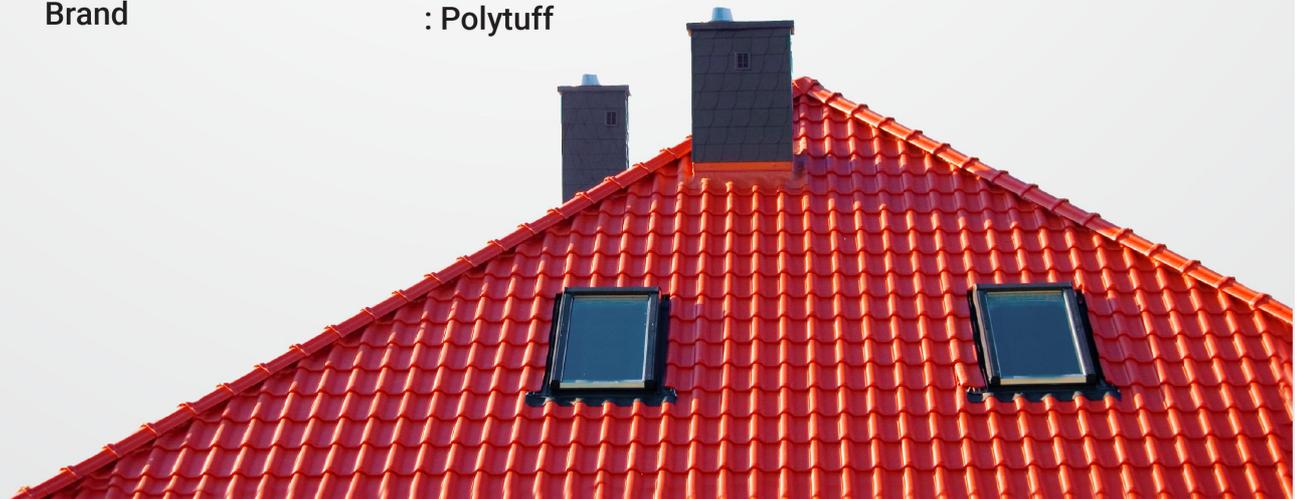

TILE SHEET

Aluminium

ORALIUM GRANTILE

Thickness	: 0.50, 0.56, 0.71 mm
Supplied width	: 1170 mm
Covered width	: 1110 mm
Sheet length	: Up to 18 ft



ORALIUM NOVA TILE

Thickness	: 0.50, 0.56, 0.71 mm
Supplied width	: 1150 mm
Covered width	: 1045 mm
Sheet length	: Up to 18 ft

ONDUVILLA

APPLICATIONS

- ◆ Lightweight
- ◆ Aesthetic
- ◆ Wind Resistant
- ◆ Water proofing
- ◆ Eco-responsible
- ◆ Complete system



TECHNICAL CHARACTERSTICS



Corrugations + Flats	: 6 + 5
Gross Surface	: 0.43 m ²
Wave Height	: 38 mm
Width	: 400 mm
Length	: 1070 mm
Thickness	: 3 mm
Weight	: 3.1 kg/m ²

ONDULINE

APPLICATIONS

- ◆ Individual & Collective Housing
- ◆ Leisure Housing
- ◆ Commercial Buildings and Resorts
- ◆ Public-access Buildings
- ◆ Renovation



ONDULINE CLASSIC

: 10
: 1.90 m²
: 38 mm
: 950 mm
: 2000mm
: 3 mm
: 3.4kg/m²



ONDULINE DURO 235

Corrugations / sheet : 9 + 4
Gross Surface : 2.11 m²
Wave Height : 38 mm
Width : 1055 mm
Length : 2000 mm
Thickness : 3 mm
Weight : 3.3kg/m²

FIBRE CEMENT BOARD

SPECIFICATION

Material	: Fiber Cement Board
Composition	: Cement & Glass fiber
Size	: 6'x4' & 8'x4'
Thickness	: 4mm to 25 mm
Usage	: walls, Ceiling
Type	: split -skin
Colour	: grey

APPLICATIONS


Kitchen Cabinets and Shelves
Internal Wall Panelling
False Ceiling
Internal Partitions
Shelves / Wardrobes



CEMENT PANEL

SPECIFICATION

Usage	: Commercial Composite partition
Material	: Fiber Cement Board
Attaching Type	: Screwed
Color	: Gray
Width	: 60 cm
Length	: 270 cm, 300 cm
Thickness	: 50mm, 75 mm & more

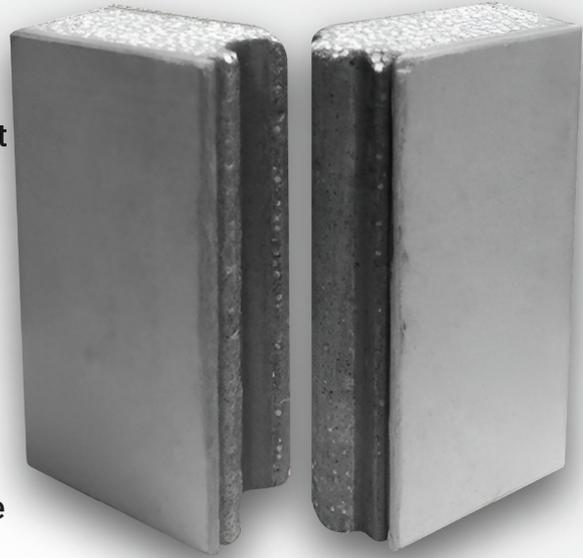

CEMENT PLANK

SPECIFICATION

Attaching Type	: Screwed
Width	: 6 Inches
Length	: 8, 9, 10 ft
Thickness	: 2 inch



WPC PLANK

SPECIFICATION


Usage	: Gate fitting, Staircase fitting, Swimming pool Flore paneling
Material	: WPC
Size	: 145 mm X 10 mm X 8 Ft
Wood Type	: Hardwood
Thickness	: 10 mm



THERMAL INSULATION MATERIAL (XLPE)

SPECIFICATION

Size	: 6mm, 9mm, 13mm, 19mm, 25mm
Color	: Gray
Operating temperature	: -40 to 115
Thermal stability	: < 5%
Water absorption	: < 2%
Density	: 28 + 3
Sound transmission class	: > 25 dB


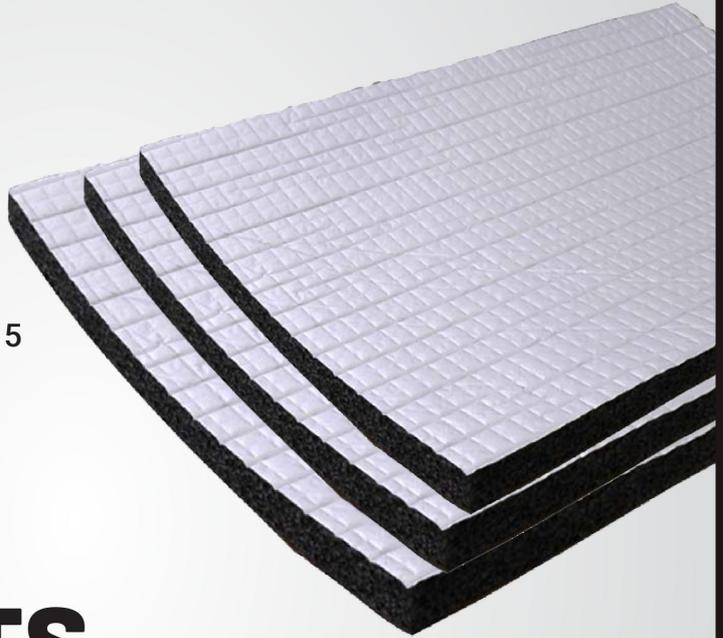


HPL SHEETS

SPECIFICATION

Thickness	: 8mm
Surface Finishing	: Polished
Color	: Available in Many colors
Width	: 1220 mm
Length	: 2440 mm & 3050 mm
usage	: interior and exterior, gate, Retail displays transaction counters, shelves, walls Architectural wall panels,



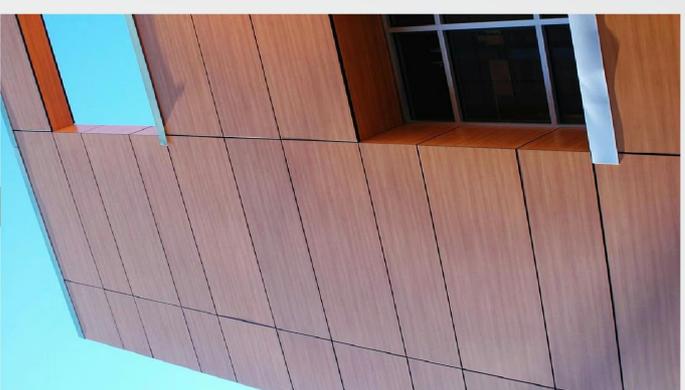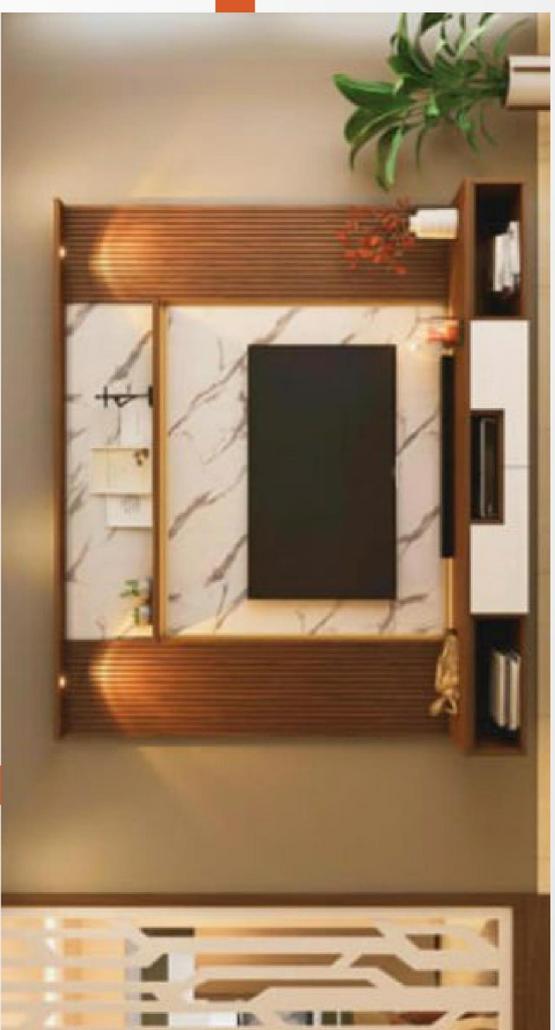

HPL SHEETS WORKS

POLYCARBONATE SHEET

SPECIFICATION


Width : 1.22m /1.52 m/2.10m
Length : upto 30.5 m
Thickness : 2mm and 3mm



COMPACT POLYCARBONATE SHEET

SPECIFICATION


Color : Transparent
Thickness : 1.8 mm to 12 mm
Usage : Residential and Commercial
Application : Sun light
Features : water Proof
Width : 1.22 meter, 1.52 and 2.10 meter
Length : upto 30.50 meter

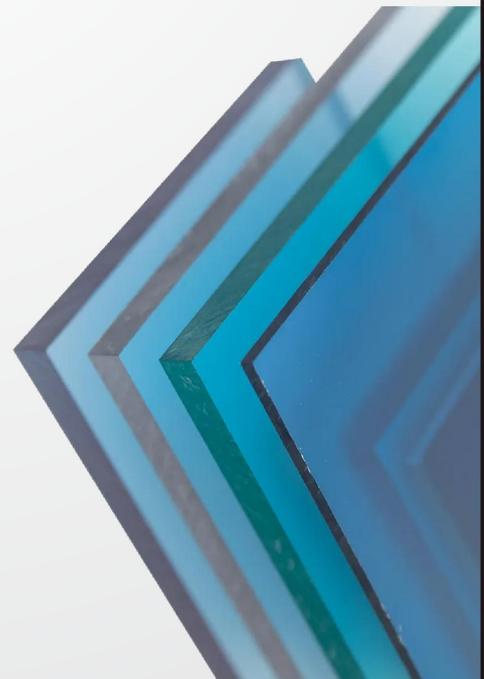

RAIN DROP POLYCARBONATE SHEET

SPECIFICATION


Color	: Blue, Green, Brownz
Material	: Poly
Thickness	: 1.5mm to 3.0mm
Usage	: Application Residential and Commercial

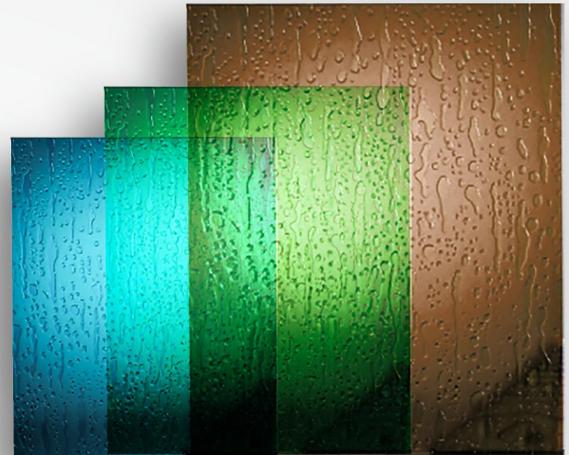

CRYSTAL POLYCARBONATE SHEET

SPECIFICATION


Size	: 2mm -3mm
Thickness	: 2.5mm -10mm

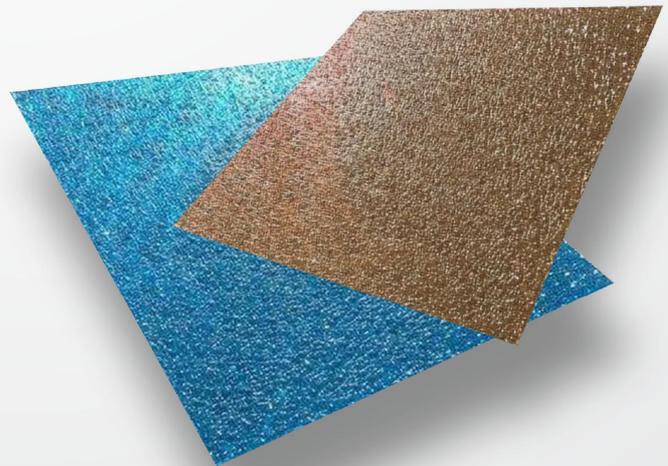

POLYCARBONATE MULTI WALL ROOFING SHEET

SPECIFICATION

Thickness	: 4 mm to 10 mm
Length	: 11.80 Meters
Material	: Polycarbonate
Surface Treatment	: UV Coated
Brand	: LOTUS
Area of Application	: Residential & Commercial
Color	: Multi Color
Structure	: Twin Wall
Width	: 1.22 & 2.10 meter
Usage	: Roof & Partition

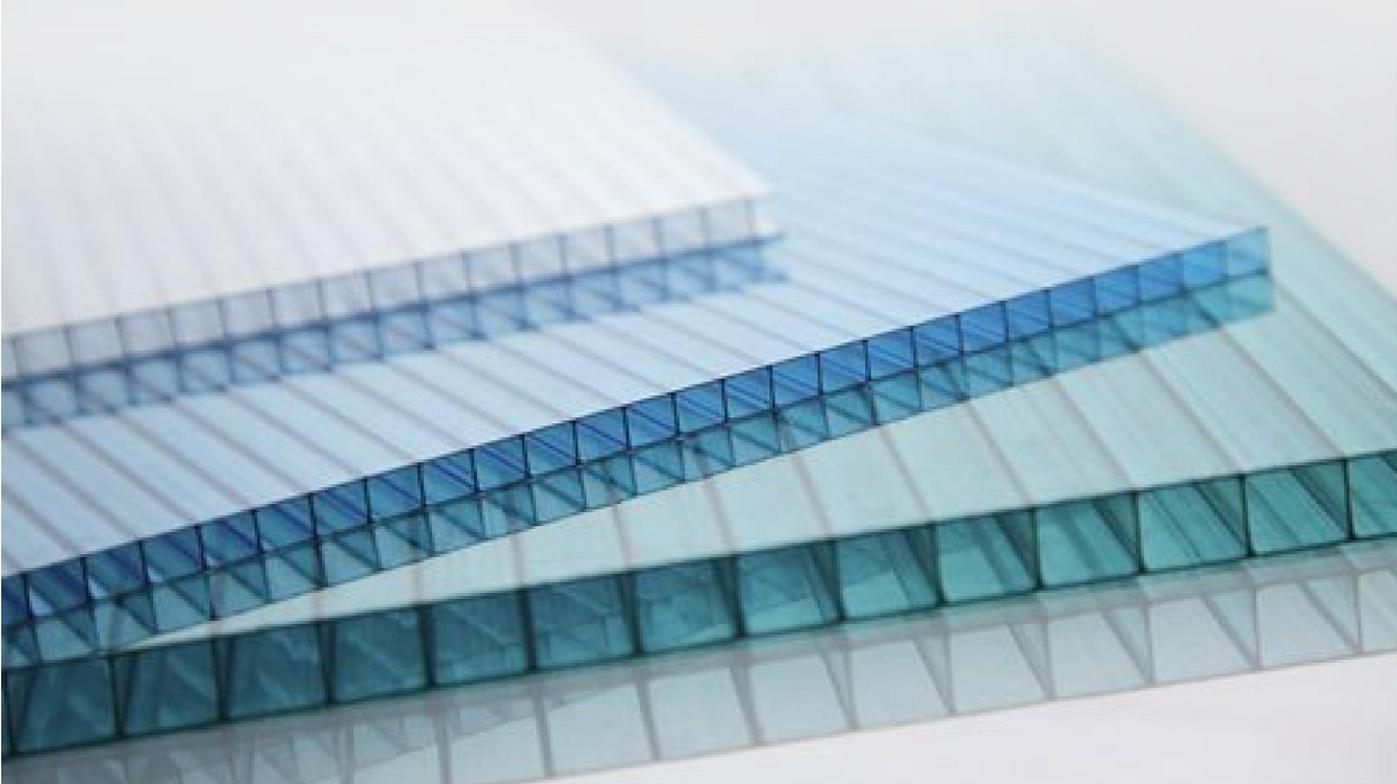

EURO GUARD SQUARE RAINWATER GUTTER

SPECIFICATION

Width	: 200 mm
Depth	: 150 mm
Length	: 3 meter ,5 meter
Thickness	: 3 mm. (4 kg/ cm2 guage),
Material	added ribs for extra strength
Color	: white, Red, Blue, Gray, Coffee Brown
Flow capacity	: 26 Liters per meter



EURO GUARD GUTTER FITTINGS

 <p>PATHY</p>	 <p>END CAP</p>	 <p>CENTER JOINT</p>	 <p>CORNER DROP</p>	 <p>CENTER DROP</p>
	 <p>END DROP</p>	 <p>CORNER/ELBOW</p>	 <p>CLAMP</p>	 <p>CORNER 45/ELBOW45</p>

EURO GUARD HYSQUARE RAINSPAM WATER GUTTER



SPECIFICATION

- Width : 160 mm
- Depth : 100 mm
- Length : 3 Meter, 5 Meter
- Thickness : 3 mm(4kg/cm² guage), Added ribs for extra strength UPVC
(unplasticised poly Vinyl Chloride)
- Color : Milky White, Brick Red, Dark Grey, Coffe Brown, Blue
- Flow Capacity : Higher than 200 mm round gutter

EURO GUARD GUTTER FITTINGS

			
END CAP	CENTER JOINT	CORNER DROP	CENTER DROP
			
END DROP	CORNER/ELBOW	CLAMP	CORNER 45/ELBOW45

AIR TURBO VENTILATOR

STAINLESS STEEL

Material	: Stainless Steel
Diameter	: 150 mm
No of vanes	: 3 meter ,5 meter
Base Ring Moc	: 21" & 24"
Top Plate Moc	added ribs for extra strength
Vanes MOC	: uPVC(unplasticised poly vinyl chloride)
Type	: Air Ventilator
Usage/Application	: Removes Hot Air from Shed
Center Shaft	: Stainless Steel
Net Weight	: 6 kgs



AIR TURBO VENTILATOR

ALUMINIUM

Material	: Aluminium
Diameter	: 610 mm
No of Vanes	: 42 Vanes (Blade)
Base Ring Moc	: stainless steel 430(mounting ring) Thickness 0.5 mm
Top Plate Moc	: Aluminium Thickness 1.2 mm
Vanes MOC	: Aluminium Thickness 0.5 mm
Rotation	: Dual Bearing Sealed Shaft with 6000ZZ& 6001ZZ bearings and self lubricating bush of Dupont Zytel 101L polyamide 66 resin to ensure frictionless rotation even at lowest Wind velocity
Center Shaft	: Stainless Steel
Net Weight	: 6 kgs

POLYPROPYLENE

Model	: Twister-400
Material	: polypropylene
Diameter	: 510 mm
No of vanes	: 18 vanes(Blade)
Base Ring Moc	: polypropylene Thickness 3mm
Top Plate Moc	: pp/Nylon Thickness 3.5mm
Vanes MOC	: polypropylene Thickness 2mm
Rotation	: Twin Sealed 6200ZZ & 6201ZZ bearings & self lubricating bush of Dupont Zytel 101L polyamide 66resin to ensure frictionless rotation even at lowest Wind velocity
Center Shaft	: Stainless Steel
Net Weight	: 2.5 Kgs




AIR TURBO VENTILATOR


POLYPROPYLENE

Model	: Twister-100
Material	: polypropylene
Diameter	: 245 mm
Neck/Throat Diameter	: 110 mm
No of vanes	: 12vanes(Blade)
Base Ring Moc	: polypropylene Thickness 2.5 mm
Top Plate Moc	: pp/Nylon Thickness 2 mm
Vanes MOC	: polypropylene Thickness 1.5 mm
Rotation	: Twin Sealed 6000ZZ bearings and self lubricating bush of Dupont Zytel 101L Polyamide 66 resin to ensure 101L Polyamide 66 resin to ensure vfrictionless rotation even at lowest wind velocity
Center Shaft	: Stainless Steel
Net Weight	: .75 kgs



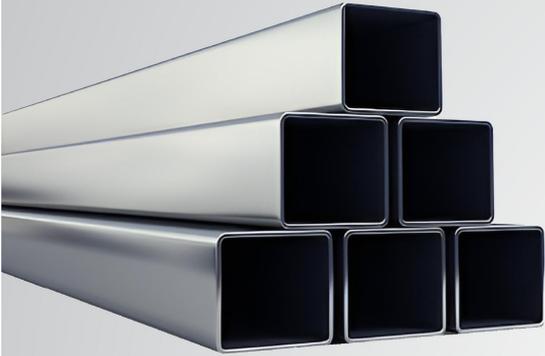

GP PIPE AND TUBES

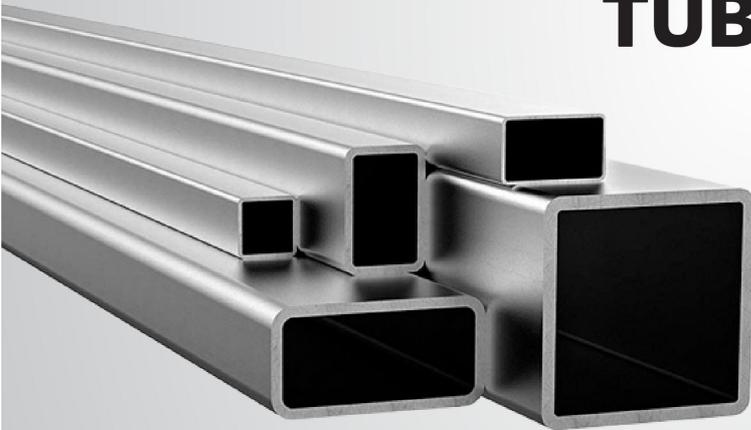


GI PIPE AND TUBES



MS PIPE AND TUBES



AVAILABLE BRANDS
TATA, BHUSHAN, APOLO, RKS

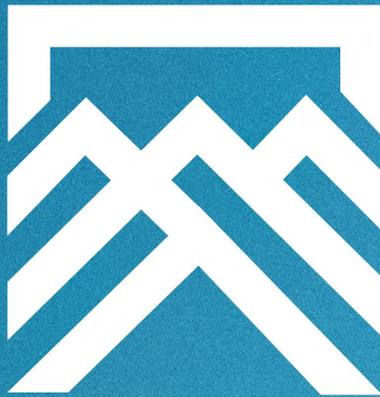

✉ infossteels@gmail.com

🌐 www.sssteelsandsheetmart.com

📍 Vennala, Kochi, Kerala 682028, India

+91 99478 11458

☎ +91 85475 90258

+91 83040 06258